

PB 100 ParkPro

The little versatile park professional.



PRODUCT HIGHLIGHTS

- ⊕ Clean 6-cylinder engine with 256 metric HP (188 kW) and powerful torque (Tier 4f and EU Stage V)
- ⊕ Intuitive joystick for proportional control of 4 blade functions at the same time
- ⊕ iTerminal with touch display and color-coded function feedback of the active vehicle parts for easy operation
- ⊕ Storage of 4 driver settings with flexible joystick button assignment for park construction
- ⊕ Precise, proportional auxiliary hydraulics
- ⊕ AutoTracer: Assistance system for ideal grooming results
- ⊕ Greatest movement radii for maximum freedom in park construction
- ⊕ Rear implement carrier with vibration compensation and lateral damping for greater driving comfort
- ⊕ Independent tiller depth adjustment: Position of the foldable side finishers and alignment of the tracking plates unit are not affected
- ⊕ NoDeck version for the best view of the SmartCut tiller in park construction
- ⊕ Optimized comfort seats for long journeys
- ⊕ Practical holders for backpack, tool and smartphone
- ⊕ The best panoramic view thanks to dimmable LED worklights, a rear camera and ramp mirrors

CAB

Comfort heating system	With automatic function and stepless temperature adjustment
Comfort driver's seat	With lordosis support, air-suspended, multiple mechanical and pneumatic adjustment positions, two-stage seat heating unit and seat ventilation
Control elements	Joystick for 4 simultaneous movements, iTerminal, armrest, drive control stick
Windows	Windshield and rear window heated, side windows sliding and heated
Outside mirrors	Heated and electrically adjustable, wide-angle, approach mirror
Wipers	Coolant-heated, heating turned on and off electrically

LIGHTING

Front	2 LED headlights 2 LED worklights, dimmable 2 LED worklights, dimmable on grab bar
Rear	2 LED worklights, dimmable 3. LED lamp center rear

AUXILIARY EQUIPMENT

Park Blade 3.6 m	OneTouchStraight function, SideCutter
Park FlexTiller SmartCut 3.2 m	With SmartCut tiller teeth and optimized finishers, all positions hydraulically adjustable, freeze function, LED lighting, camera
ProMount	Swap system with radial kinematics for a greater movement radius in park construction




OPTIONS

Brush guard	Steering wheel control
Front high-pressure connection (technology package)	Tracking plates with/without track tiller
Implement carrier with side damping when swinging	Radio with Apple CarPlay and Android Auto
Hydraulic oil preheating	SnowSat fleet management and snow depth measurement with LiDAR
Air conditioning	Auxiliary heating
Loading platform	Reinforced tensioning axle
Central locking	

On Top of the Mountain since 1969.

PistenBully®

PB 100 ParkPro

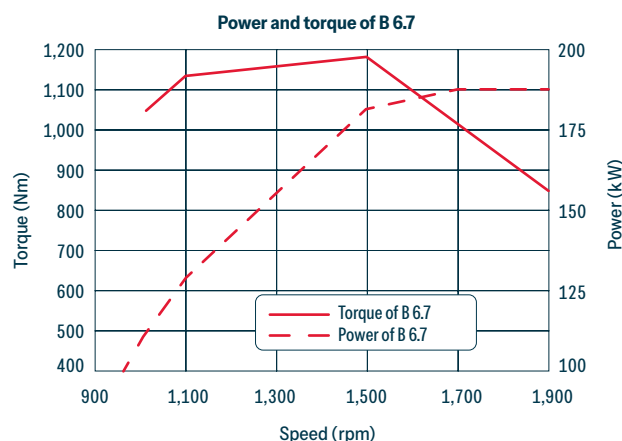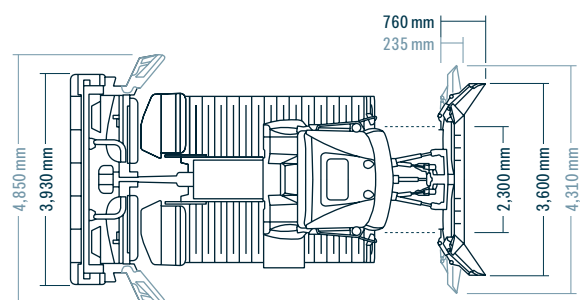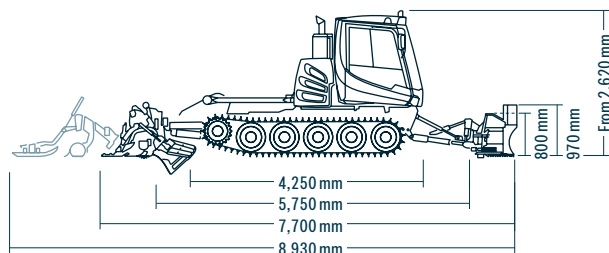

DIMENSIONS

Width	Without tracks and fenders	2,300 mm
	Over steel tracks 970 mm	2,800 mm
	Over tracks 1,130 mm (combi/X-Track)	3,120 mm
Height	Total for Solo (depending on the additional options)	2,620 mm - 2,740 mm
	With driver's cab tilted	3,350 mm
Length	With all way blade, tiller and track profiler	max. 8,930 mm
Ground clearance		320 mm

WEIGHTS (FROM)

Empty weight	Vehicle without tracks / quick-change system	from 4,410 kg
	Combi tracks 1,130 mm	960 kg
	X-track chains 1,130 mm	1,250 kg
	Steel tracks 970 mm	1,460 kg
Operating weight*	Vehicle with combi tracks/front blade/tiller	from 6,430 kg
Permitted gross weight (in accordance with ROPS)		8,500 kg
Payload of NoDeck loading platform		500 kg
Payload, load platform		1,500 kg

* Minimum operating weight (according to standard)

ENGINE

Type	Cummins B 6.7
Number of cylinders	6
Displacement	6,700 cm ³
Power in accordance with ECE	188 kW / 256 hp (metric)
Exhaust gas standard	Tier 4f/EU Stage V/China IV
Max. torque	1,152 Nm @ 1,500 rpm
Tank capacity	190 l
DEF (AdBlue®) tank capacity	19 l
Fuel consumption	from 8.5 l/h

DRIVING CHARACTERISTICS

Speed	Stepless from 0 – 25 km/h
Turning radius	On the spot



Contact

Fast. Direct. In person.
Find your contact person here.

www.pistenbully.com



KÄSSBOHRER ALL TERRAIN VEHICLES INC.