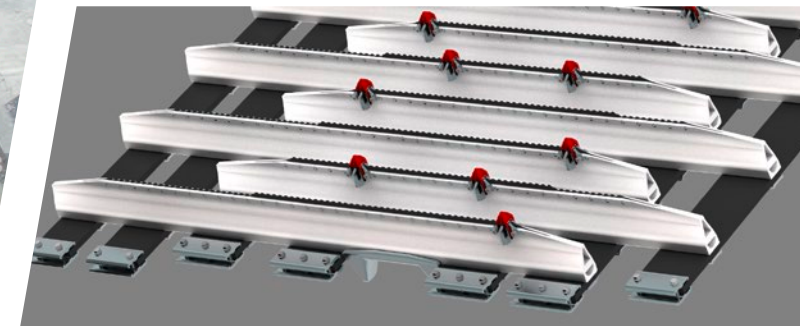
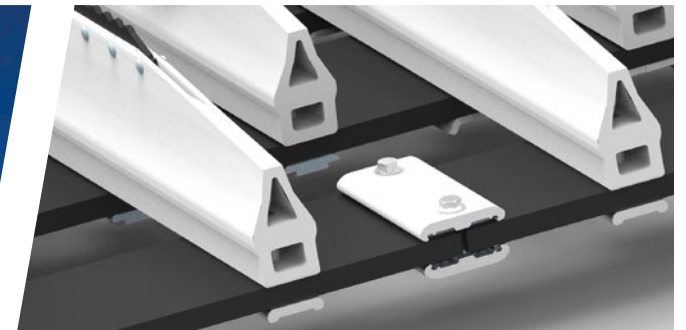


Combi track / CombiPlus track





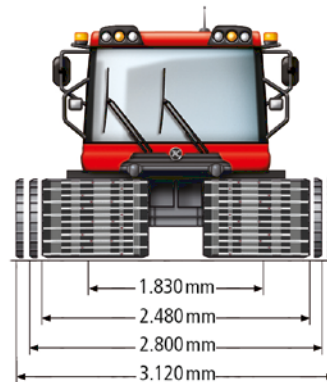

COMBIPLUS TRACK

The perfect combination of materials, with lightweight aluminium cleats and a heavy-duty steel edge results for optimum traction. These strong, extremely wear-resistant track cleats are notable for high strength and optimum power transmission. The toothed steel edge and additional track elements make for optimum travel and climbing behavior on all snow-covered surfaces.

AREAS OF APPLICATION

The CombiPlus tracks can be used everywhere, from "normal" terrain to steep slopes. Their toothed steel edge encounter no problems during dozing and preparation work, even on artificial snow or icy slopes. The toothed steel edge also provide effective protection against damage and wear caused by the soil when the vehicle is driven on thin layers of snow.

5-belt track

6-belt track

7-belt track

PB 100

PB 400

PB 600

PB 600 E+


Vehicle type	Combi track	CombiPlus track	Overall width for track width (mm)		Weight* per chain set	Cleats pcs.	Cleat height	Cleat width	Distance of belts	Number of belts	Thickness of belts	Drive sprocket gear
			1830	2350								
PB 100	810 mm		2480		760 kg	68	82,1 mm	40 mm	116,5 mm	3	10 mm	13
	970 mm		2800		760 kg							
	1130 mm		3120		960 kg							
PB 400	1648 mm			4250	1700 kg	75	108 mm	40 mm	116,5 mm	5	10 mm	
PB 600		1648 mm		4250	2070 kg	74	115 mm	40 mm	123,5 mm	6	15 mm	14
		1648 mm		4250	2040 kg	68	120 mm	45 mm	135 mm	7		13
PB 600 E+		1648 mm		4250	2120 kg	75	115 mm	40 mm	123,5 mm	6	15 mm	14
		1648 mm		4250	2080 kg	69	120 mm	45 mm	135 mm	7		13