


Technical data

| | | |
|-----------------------------|--|-------------|
| Engine | Cummins QSL 9 diesel, turbocharged, after cooled. EPA Tier 3 | |
| Displacement | 8.9 liter | 6 cyl |
| Output (SAE) | 370 horsepower | |
| Maximum torque | 1120 ft lb @ 1,200—1,600 rpm | |
| Fuel tank capacity | 69 gallons | 260 liters |
| Transmission | Rexroth hydrostatic; infinitely variable | |
| Steering | Half moon steering wheel, electronic | |
| Brakes | Hydrostatic; dynamic feedback Two multi-disk parking brakes | |
| Alternator | 28 V / 140 Amps | |
| Batteries | 2 x 12 V / 135 Ah | |
| Speed, low range | 0-12 mph | 0-19 km/h |
| Speed, high range | 0-17 mph | 0-27 km/h |
| Fuel usage | From 5 gal/hr | 19 liter/hr |
| Suspension | 5 axle independent, torsion bar | |
| Wheels | 14 inch; solid rubber in 3 durometers | |
| Tracks | X track high performance rubber track 3.6 m steel track, closed profile | |
| Ground clearance | 14 in | 350 mm |
| Vehicle weight | 17,450 lbs | 7930 kg |
| Payload on rear deck | 3,300 lbs | 1500 kg |



Standard equipment

Deluxe drivers cabin with 4 point mounting with rear floating hinges, oil/gas shocks, heat/noise insulation, integral rollover protection
 Electric over hydraulic tilt for cabin and deck
 Deluxe comfort operator's seat with 16 point adjustments, heated backrest, seat cushion and left armrest, seatbelt
 Passenger seat with seat belt
 Customized heat/defroster for optimum fresh/warm air flow
 Heated foot well
 Heated front windshield, heated rear window
 Heated side windows, heated outside mirrors
 Heated front wipers via engine coolant
 High performance halogen working lights in front and rear
 Sidefinder lights illuminate trail's edge and blade wings
 Dashmount screen for vital system display / fault code readout
 Full instrumentation, backup alarm, 2 warning beacons
 AM/FM radio with CD player, Blaupunkt stereo speakers
 Hydraulic track tensioning system
 Modular frame constructed from high strength cold resistant steel
 110 volt engine coolant heater
 Slot-in removable tubular deck rails
 Front joystick for blade control; hydraulic proportional
 Full brush guard; sun roof
 Rear draw bar with pintle hitch; 4 hydraulic circuits at rear
 Switch panel for drag control, remote control for passenger
 Magnum sprockets for maximum wear (optional)
 Deck mount 5th wheel (optional)

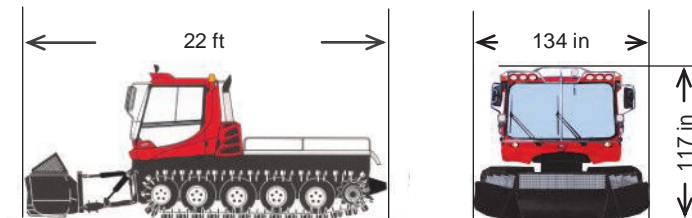

 KÄSSBOHRER ALL TERRAIN VEHICLES, INC.

Tel: 775 · 857-5000
 Email: contact@pistenbullyusa.com
 Web: www.pistenbullyusa.com