



Front Snowblower

Efficient snow movements.

www.pistenbully.com

PistenBully®

Front Snowblower



Uses

Snow movement from the edge of the ski slopes to worn out areas, snow redistribution, cutting and filling moguls, laying down new trails, clearing old trails, transporting snow back from the ski run edge to the main ski slopes and uniform distribution.


Design

PistenBully 100

The Snowblower consists of a spiral cutter blade and two impeller with 2 chutes. The generous size and cross-section of these components makes the attachment highly efficient. The ejector chutes can be turned hydraulically through 250 degrees. Its angle is also adjustable. The ejector flaps on the chutes are repositioned hydraulically, so that the ideal ejecting time and distance can be chosen. Two double-acting control circuits are used, with operation from the front-end attachment controls in the driver's cabin. The attachment can be repositioned sideways so that it can operate across the entire width of the vehicle.

PistenBully 200/ 300/ 400 / 600

Exceptionally robust, two-stage blower with high performance reserves and double spiral tillers, plough wheel and discharge cross-section for excellent efficiency. Drive and gears are rated for high engine speeds; as a result large ejection distances can be achieved. Considerable increase in performance, in particular in forward movement speed, due to narrow construction. Better front vision as a result of only one ejector chute and fewer moving parts.

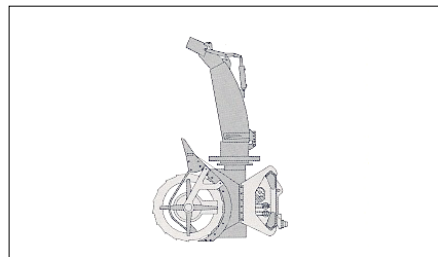

Front Snowblower for PistenBully 100:

Auger diameter:	550 mm	21.7"
Impeller diameter:	520 mm	20.5"
Clearing width:	2.700 mm	106.3"
Clearing height:	720 mm	28.3"
Overall height:	app. 1.600 mm	63"
Ejecting distance (adjustable):	up to 30 m	33 yds.
Weight:	app. 640 kg	1,410 lbs.

Front Snowblower for PistenBully 200/ 300/ 400/ 600:

Auger diameter:	750 mm	29.5"
Impeller diameter:	750 mm	29.5"
Excavated area to left and right:	each 800 mm	31.5"
Clearing width:	4.300 mm	169.3"
Total width:	2.700 mm	106.3"
Ejecting distance (adjustable):	up to 40 m	44 yds.
Weight:	app. 970 kg	2,140 lbs.

Kässbohrer Geländefahrzeug AG

Kässbohrerstraße 11, 88471 Laupheim
Phone: +49 (0) 73 92/9 00-0, Fax: +49 (0) 73 92/9 00-4 45
www.pistenbully.com, E-Mail: info@pistenbully.com

Austria

Gewerbestraße 173, 5431 Kuchl
Phone: +43 (0) 62 44/4 00 10, Fax: +43 (0) 62 44/40 01 11
www.pistenbully.at, E-Mail: office@pistenbully.at

Switzerland

Bruneggerstraße 45, 5103 Möriken
Phone: +41 (0) 62/8 87 70 50, Fax: +41 (0) 62/8 87 70 51
www.pistenbully.ch, E-Mail: info@pistenbully.ch

Italy

Via Galileo Galilei, 32, 39100 Bolzano
Phone: +39 0 4 71/93 30 27, Fax: +39 0 4 71/93 29 75
www.pistenbully.it, E-Mail: info@pistenbully.it

France

Kässbohrer E.S.E.
Portes de Tarentaise, 73790 Tours en Savoie
Phone: +33 (0) 4 79/10 46 10, Fax: +33 (0) 4 79/10 46 40
www.pistenbully.fr, E-Mail: info@pistenbully.fr

USA

Kässbohrer All Terrain Vehicles Inc.
750 A South Rock Boulevard, Reno Nevada 89502
Phone: +1 (0) 7 75/78 57-50 00, Fax: +1 (0) 7 75/78 57 50 10
www.pistenbullyusa.com, E-Mail: info@katvpb.com



KÄSSBOHRER GELÄNDEFahrZEUG AG