



ParkBlade

The Art of Designing Funparks.

www.pistenbully.com

PistenBully[®]

ParkBlade



The ParkBlade. A further attachment from Kässbohrer which makes your job easier. The multitalent for creation and maintenance of Funpark and Boardercross. But also for transporting Rails, Funboxes,...

Die Top Solution:


Unique. With the new ParkBlade you are extremely flexible. You are working as usual on your ski-runs or on the Funpark. But the ParkBlade can do much more. Via foot switch you activate the additional function. The side wings of the blade are fixed in the current position. Now you can fold via joystick the prongs of the ParkBlade hydraulically. Those are placed directly underneath the snow grate of the ParkBlade and are well visible from the driver's seat. The ParkBlade is ready. Now you transport any object. Whether obstacles in the Funpark, Funboxes and Rails or objects of transportation, rubbish bins,...

Loads up to 1,000 kg are no problem for the ParkBlade and your PistenBully. In addition, only in extreme cases load-securing straps are necessary to fix the loading.

Another advantage:

The ParkBlade has a serrated finisher bar. This enables the driver, to gibe the Funpark-elements like Bankturns, Tables or Jumps a uniform and attractive surface structure in one machining operation when backblading.

The ParkBlade is a standard equipment of the PistenBully 200 *Park*, the PistenBully 300 *Park*, the PistenBully 400 *Park* and the PistenBully 600 *Park*. Optional it can also be mounted on standard vehicles of the model range PistenBully 200/ 300/ 400 and 600, if the vehicles have been prepared for this.

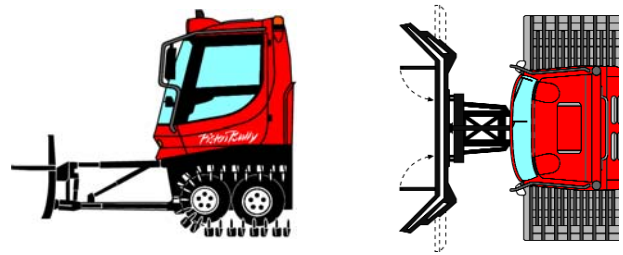

ParkBlade for PistenBully 200/ 300/ 400/ 600:

| | | |
|-----------------------------|-------------|---------------------|
| Working width of the blade: | 5,400 mm | 213 in. |
| Foldable pronges: | | |
| Length of the pronge: | 700 mm | 28 in. |
| Width of the pronge: | 40 mm | 1.6 in. |
| Height of the pronge: | 75 mm | 3 in. |
| Distance of the pronge: | 2,130 mm | 84 in. |
| Height of pronge: | 725 mm | 29 in. above ground |
| Underside of pronge: | 685 mm | 27 in. above ground |
| Payload limit: | 1,000 kg | 2,200 lbs. |
| Operation of the pronge: | hydraulical | |

Kässbohrer Geländefahrzeug AG

Kässbohrerstraße 11, 88471 Laupheim
Phone: +49 (0) 73 92/9 00-0, Fax: +49 (0) 73 92/9 00-4 45
www.pistenbully.com, E-Mail: info@pistenbully.com

Austria

Gewerbestraße 173, 5431 Kuchl
Phone: +43 (0) 62 44/4 00 10, Fax: +43 (0) 62 44/40 01 11
www.pistenbully.at, E-Mail: office@pistenbully.at

Switzerland

Bruneggerstraße 45, 5103 Möriken
Phone: +41 (0) 62/8 87 70 50, Fax: +41 (0) 62/8 87 70 51
www.pistenbully.ch, E-Mail: info@pistenbully.ch

Italy

Via Galileo Galilei, 32, 39100 Bolzano
Phone: +39 0 4 71/93 30 27, Fax: +39 0 4 71/93 29 75
www.pistenbully.it, E-Mail: info@pistenbully.it

France

Kässbohrer E.S.E.
Portes de Tarentaise, 73790 Tours en Savoie
Phone: +33 (0) 4 79/10 46 10, Fax: +33 (0) 4 79/10 46 40
www.pistenbully.fr, E-Mail: info@pistenbully.fr

USA

Kässbohrer All Terrain Vehicles Inc.
750 A South Rock Boulevard, Reno Nevada 89502
Phone: +1 (0) 7 75/78 57-50 00, Fax: +1 (0) 7 75/78 57 50 10
www.pistenbullyusa.com, E-Mail: info@katvpb.com



KÄSSBOHRER GELÄNDEFahrZEUG AG